


SENTRY WELLNESS SYSTEM

DualGuard Series Installation Instructions

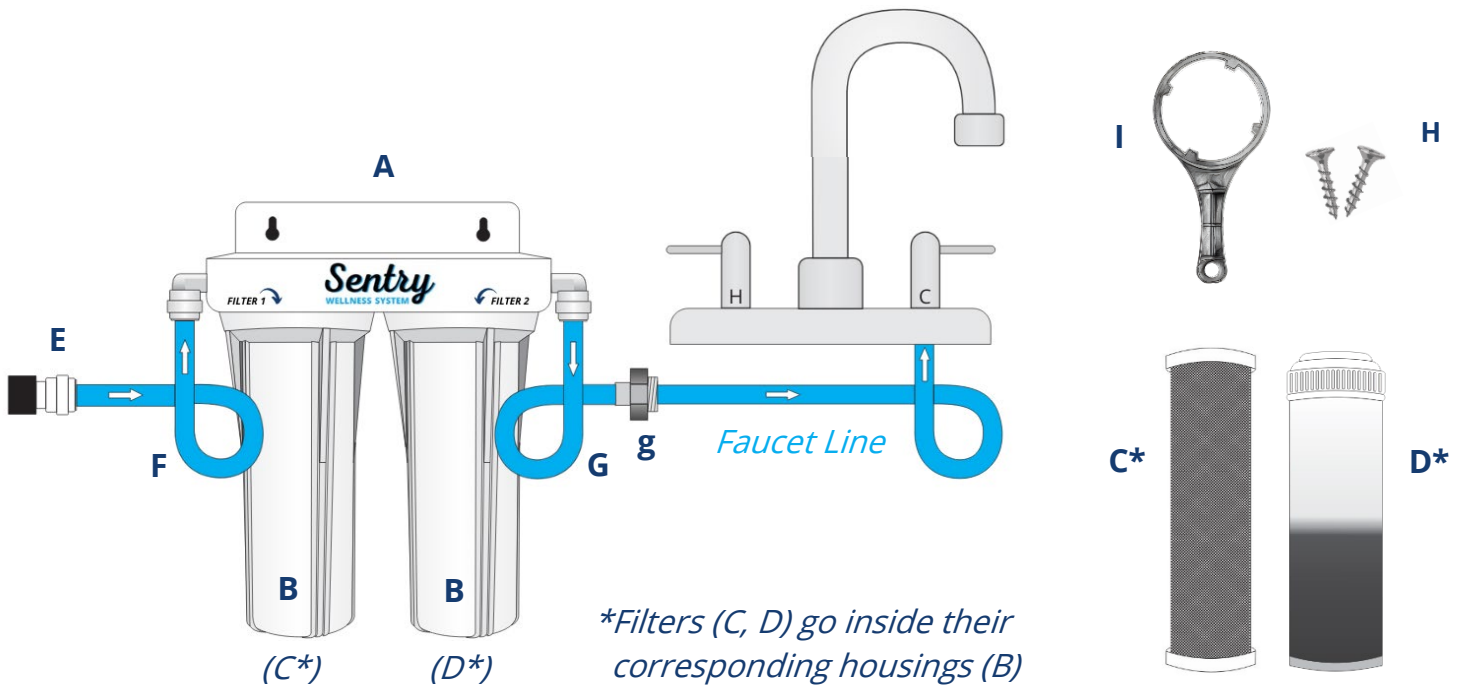

Sentry Wellness System Contents (P/N: CP-SWS):

- | | |
|---|---|
| A) 1 Pre-Installed White Bracket | F) $\frac{3}{8}$ " Tubing for Cold Water-to-Inlet Connection |
| B) 2 Housings with O-Rings | G) $\frac{3}{8}$ " Tubing for Outlet-to-Faucet Connection (with male fitting, g) |
| C) FILTER 1: ToxyGuard | H) 2 Screws (for mounting to wall) |
| D) FILTER 2: AlkaGuard | I) 1 Wrench (for removing housings when changing filters; set aside for future filter replacements) |
| E) 1 Quick-Disconnect Female Collet with Gasket | |

Verify you have the necessary components listed above before starting installation.

IMPORTANT: DO NOT REMOVE PLASTIC WRAP FROM FILTERS UNTIL STEP 2.

Tools Needed (Not Included):

- 1-2 Adjustable Wrenches/Pliers
- Drill with a Philips Head Drill Tip

Scan QR Code to watch installation video or visit SentryH2O.com



STEP 1: Choose location for installation (i.e. cabinet wall under the sink). Using the holes in the white bracket as a guide, mark the mount points. Then drill the 2 mounting screws into your marks and place the system bracket onto the screws.

- STEP 2:** Remove plastic wrap from **FILTER 1: TOXYGUARD** and place into the left-side Housing labeled **FILTER 1**. Twist housing securely closed by hand. Remove plastic wrap from **FILTER 2: ALKAGUARD** and place into the right-side Housing labeled **FILTER 2**. Twist housing securely closed by hand. **Unwrap and install each filter one at a time to avoid mixing them up; filters MUST be placed into their correct housings.**
- STEP 3:** Identify the cold-water source by turning your faucet on to 100% cold and then shut off the cold-water flow by turning the corresponding water valve clockwise. This valve should remain off for the entire installation process.
- STEP 4:** Using an adjustable wrench, remove the faucet line from the cold-water valve. Position a container beneath the valve to catch water from the line.
- STEP 5:** Locate the female quick-disconnect collet (E, in the bag with the screws). Thread the collet onto the water valve, while **ensuring the black gasket stays in** the collet to prevent leaks.
- STEP 6:** Locate the cold water-to-inlet connection tubing (this has no fittings attached to it). Push one tube end into the Inlet Head (**FILTER 1** Housing Lid) and the other tube end into the female quick-disconnect collet from Step 5. Tug on line at points of connection to ensure tight fit.
- STEP 7:** Locate the outlet-to-faucet connection tubing (with the pre-installed male fitting). Push the tube end into the Outlet Head (**FILTER 2** Housing Lid). Then thread the faucet line onto the pre-installed male fitting carefully to avoid cross-threading (this is the line that was removed from the cold water valve in Step 4). Tighten by hand and then use 1 or 2 adjustable wrenches to fully tighten. Tug on the line to ensure a tight fit. Place system onto the bracket screws that were installed in Step 1.
- STEP 8:** Restore the cold water flow by turning the cold water valve counter-clockwise with your faucet on. Check for leaks at the fitting locations or housing gasket locations. If there is a leak, either the tubes need to be pushed in further, the threads need slightly more tape, or the housings need to be reset via Step 2. We recommend checking for leaks at this point and then again once you turn off your faucet. Continue to monitor for 1 week.
- STEP 9:** Run the cold water for 5-10 minutes to purge the system of excess filtration media dust. If water appears cloudy or tastes bitter, continue to purge the system for another 5 minutes or until water runs clear. As the system normalizes, you may notice reduced water pressure for up to 1 week. If you're experiencing significantly reduced water flow, flush the filters by switching back and forth between hot and cold water at the faucet for up to 5 minutes.
- STEP 10:** Replace filters annually and enjoy your new Wellness System! If you have any questions or concerns, please contact us at the phone number or email below.



1-833-377-3817



CleanWater@SentryH2O.com



SentryH2O.com